
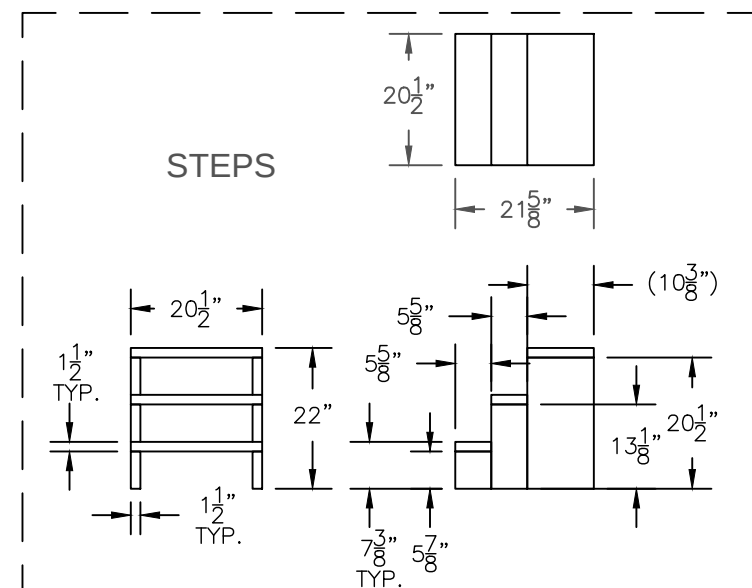
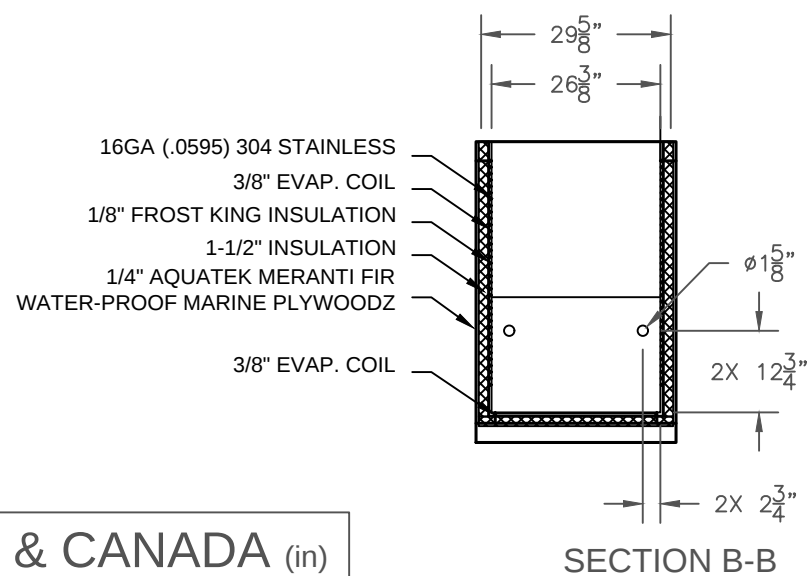
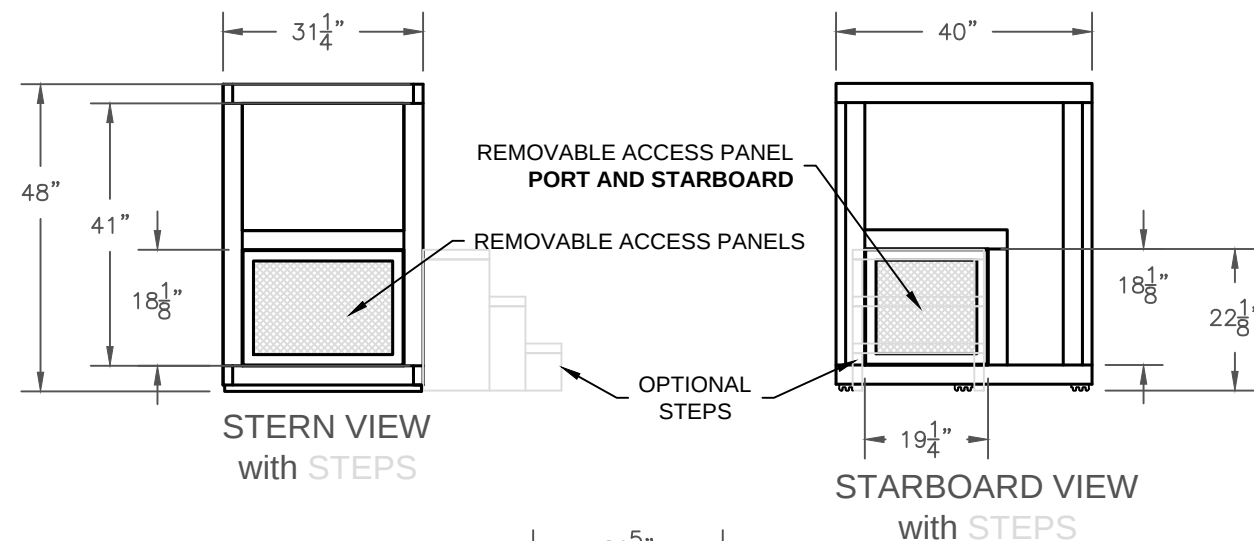
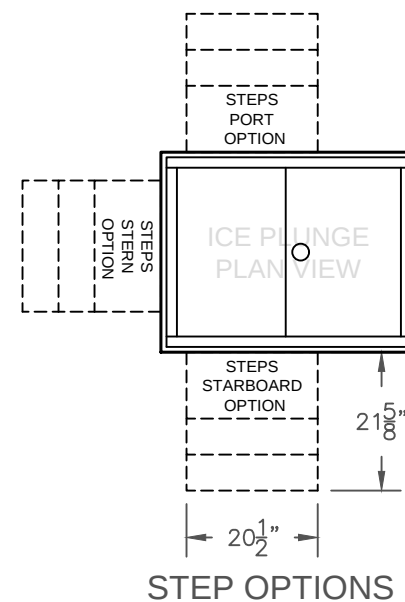
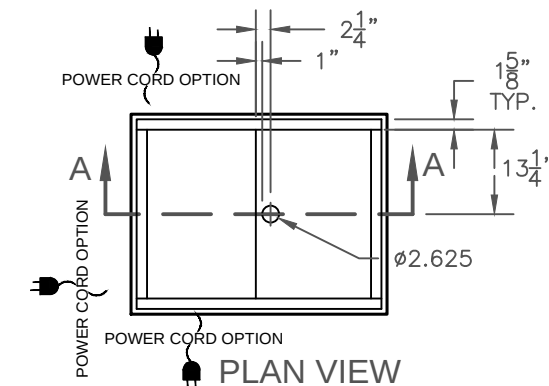
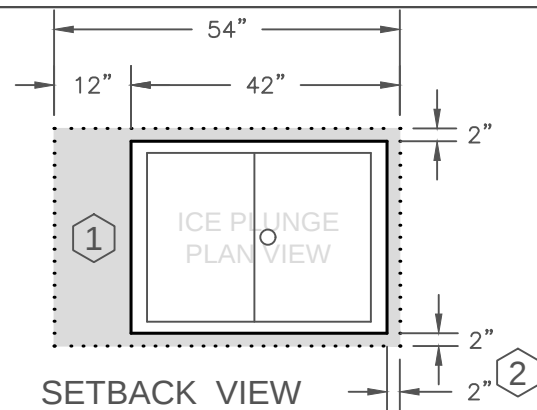


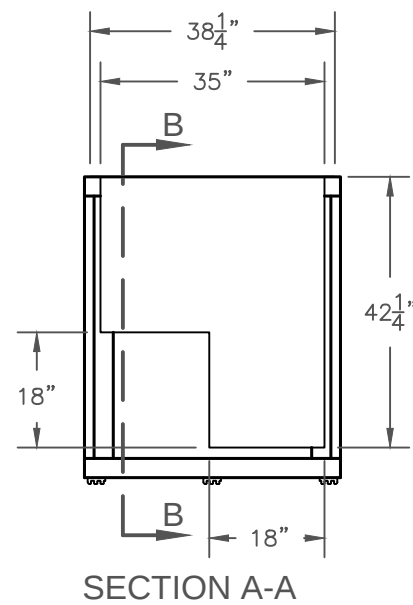

Setback and Clearance Notes

- To facilitate service and filter changes, maintain a clearance of 12" from stern to nearest wall.
- To maintain good air circulation for cooling, please maintain a minimum of 2" from the Starboard and Port sides to nearest wall.

Materials Data

Dry Weight: 435 lb
Water Weight: 917 lb
Wet Weight: 1352 lb
Tub: 16GA 304 Stainless Steel
Woodframe: Yukari FSC-Certified Rot-Resistant Red Grandis Hardwood
Plywood: Aquatek Meranti Fir Water-Proof Marine Plywood
Wood Sealer: Exoshield Tung Oil

Electrical Data

Voltage: 120 volts single phase
Frequency: 60hz
Amps: 12.5 amps
GFCI Trip Current: 4-6mA

Mechanical Data

Compressor Power: 1/3 hp
Refrigerant: R134a
Plunges Time per Day: 270 minutes
Ambient Operating Temperature: : 15°F - 120°F
Water Temperature: 33°F - 70°F

Water Treatment

Total Water Volume: 110 gal
Disinfection: O₃
Pump: DC50E-24150
Filter: 35sf Cartridge Filter
Ozone Injection Rate: 100 mg/hr
Flowrate: 6.2 GPM
Water Turnover Rate: 17 Minutes

DISCLAIMER:

THE MOROZKO IS DESIGNED TO SUPPORT A HEALTHY LIFESTYLE, NOT DIAGNOSE, CURE, OR PREVENT SPECIFIC DISEASES OR MEDICAL CONDITIONS. MOROZKO ICE BATHS ARE NOT MEDICAL DEVICES, AND HAVE NOT BEEN EVALUATED BY THE FDA. MOROZKO MAKES NO CLAIMS OR WARRANTIES WITH REGARD TO THE HEALTH EFFECTS OF COLD PLUNGE THERAPY OR USE OF MOROZKO PRODUCTS. SEEK MEDICAL ADVICE FROM YOUR PHYSICIAN BEFORE EMBARKING ON A PROGRAM OF DELIBERATE COLD EXPOSURE.


USA & CANADA (in)

LAST SAVED: 7/23/2025 1:54 PM







7150 W. Roosevelt Street
Suite A161
Phoenix, AZ 85043
(602) 456-6338
www.morozkoforge.com

TECHNICAL SPECIFICATIONS		
ICE PLUNGE		
SCALE:	1:30	SHEET SIZE B

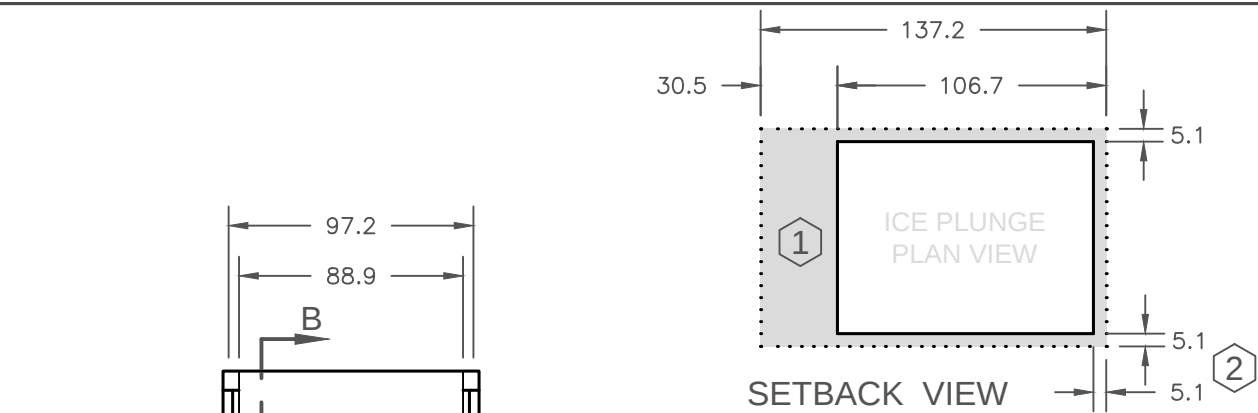

Setback and Clearance Notes

- 1 To facilitate service and filter changes, maintain a clearance of 30.5 cm from stern to nearest wall.
- 2 To maintain good air circulation for cooling, please maintain a minimum of 5.1 cm from the Starboard and Port sides to nearest wall.

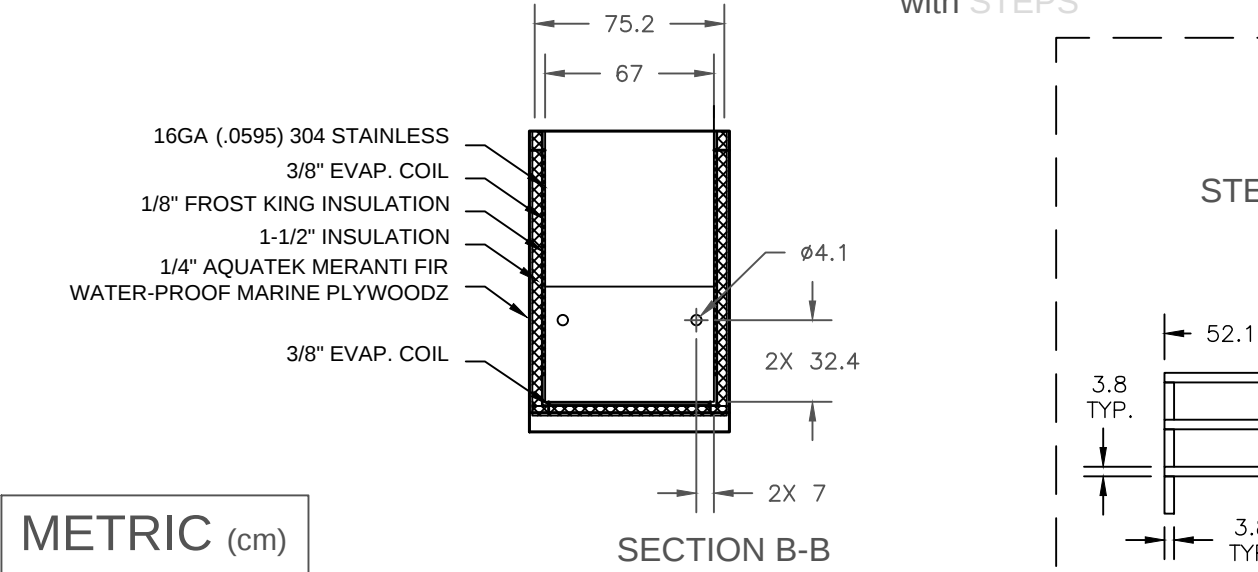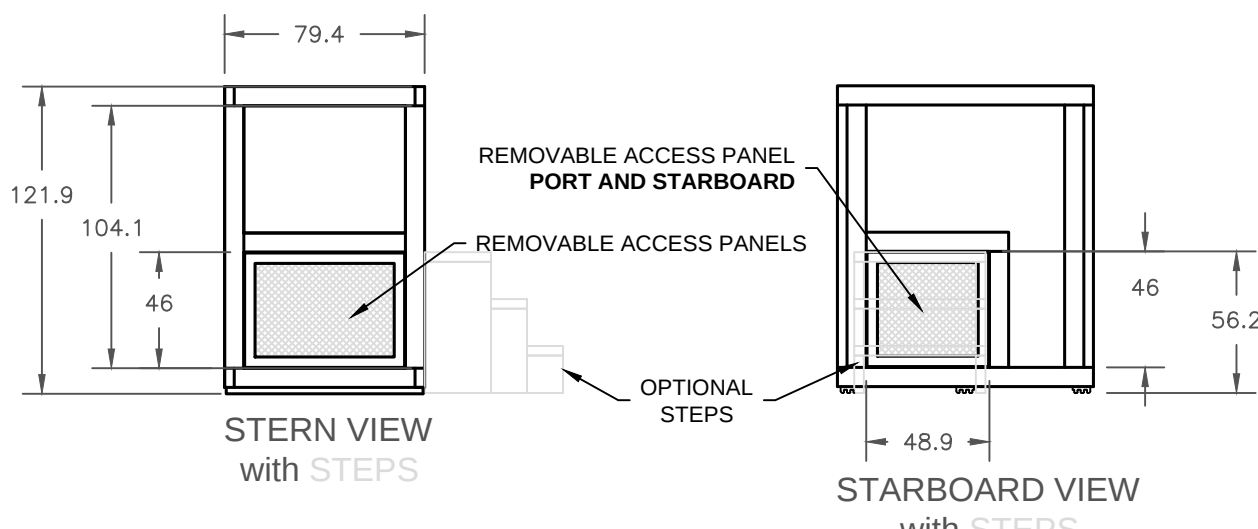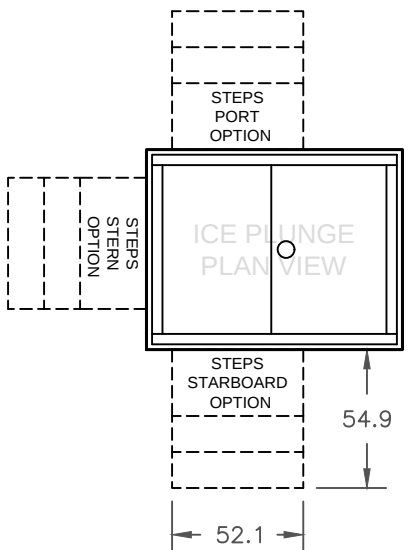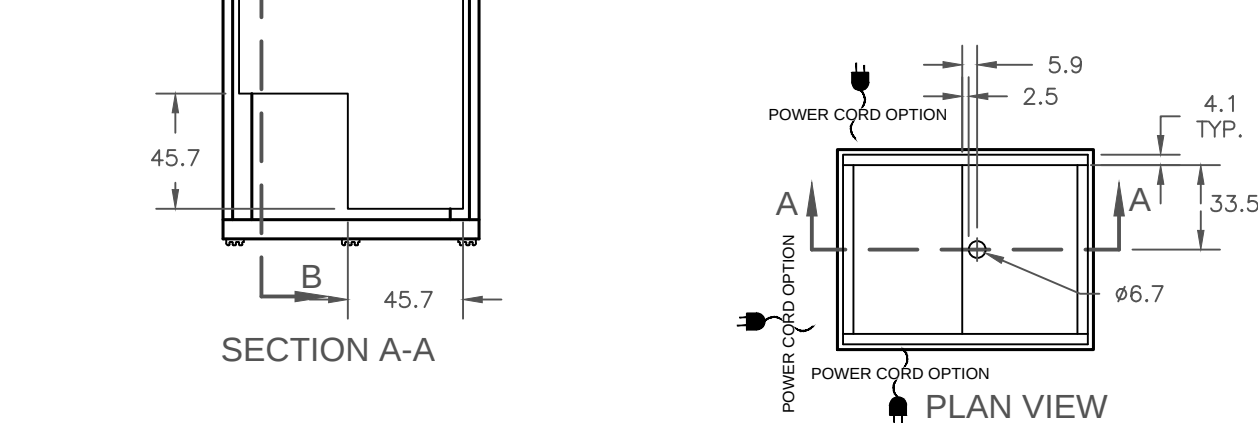

Materials Data

Dry Weight: 198 kg
Water Weight: 412 kg
Wet Weight: 610 kg
Tub: 16GA 304 Stainless Steel
Woodframe: Yukari FSC-Certified Rot-Resistant Red Grandis Hardwood
Plywood: Aquatek Meranti Fir Water-Proof Marine Plywood
Wood Sealer: Exoshield Tung Oil

Electrical Data

Voltage: 220V Single Phase
Frequency: 60hz
Amps: 7 amps
GFCI Trip Current: 4-6mA

Mechanical Data

Compressor Power: 1/3 hp
Refrigerant: R134a
Plunges Time per Day: 270 minutes
Ambient Operating Temperature : -9°C - 49°C
Water Temperature: 1°C - 21°C

Water Treatment

Total Water Volume: 417 L
Disinfection: O₃
Pump: DC50E-24150
Filter: 35sf Cartridge Filter
Ozone Injection Rate: 100 mg/hr
Flowrate: 23.47 Liters per Minute
Water Turnover Rate: 17 Minutes

DISCLAIMER:

THE MOROZKO IS DESIGNED TO SUPPORT A HEALTHY LIFESTYLE, NOT DIAGNOSE, CURE, OR PREVENT SPECIFIC DISEASES OR MEDICAL CONDITIONS. MOROZKO ICE BATHS ARE NOT MEDICAL DEVICES, AND HAVE NOT BEEN EVALUATED BY THE FDA. MOROZKO MAKES NO CLAIMS OR WARRANTIES WITH REGARD TO THE HEALTH EFFECTS OF COLD PLUNGE THERAPY OR USE OF MOROZKO PRODUCTS. SEEK MEDICAL ADVICE FROM YOUR PHYSICIAN BEFORE EMBARKING ON A PROGRAM OF DELIBERATE COLD EXPOSURE.

METRIC (cm)

LAST SAVED: 7/23/2025 1:54 PM

 MOROZKO FORGE LLC	7150 W. Roosevelt Street Suite A161 Phoenix, AZ 85043 (602) 456-6338 www.morozkoforge.com	TECHNICAL SPECIFICATIONS	
		ICE PLUNGE - 220V	
SCALE: 1:30		SHEET SIZE	B